





**UTILLAJE PARA
PRENSA PLEGADORA
PRESS BRAKE TOOLING**

11º EDICIÓN



AMARRE ESTÁNDAR STANDARD TIE

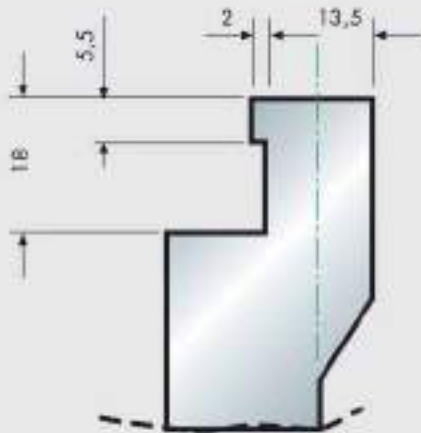


AMARRE ESTÁNDAR 2 (MARCADO*) STANDARD TIE 2 (MARKED*)

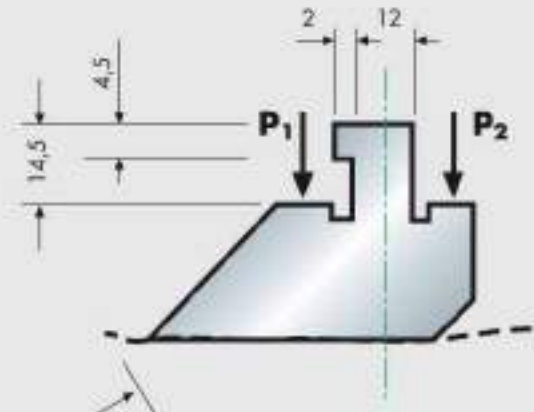

FABRICADO EN ACERO
42 CrMo4 RECTIFICADO
MANUFACTURED IN STEEL
42 CrMo4 RECTIFIED

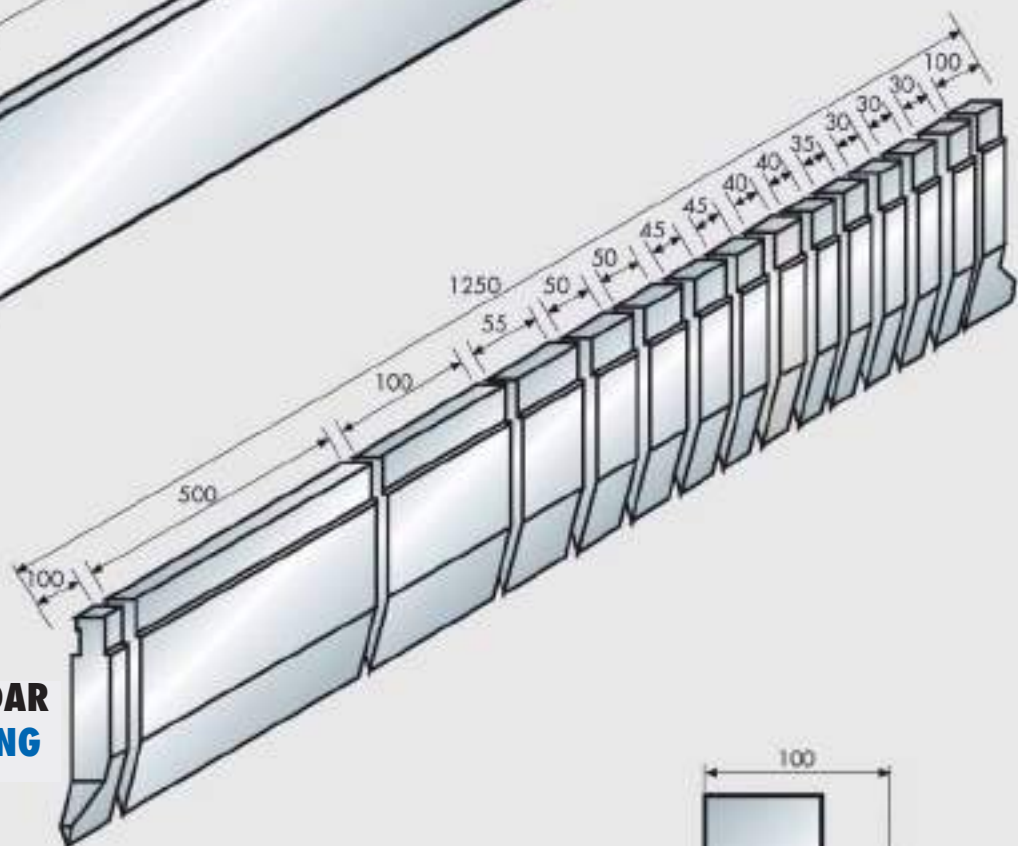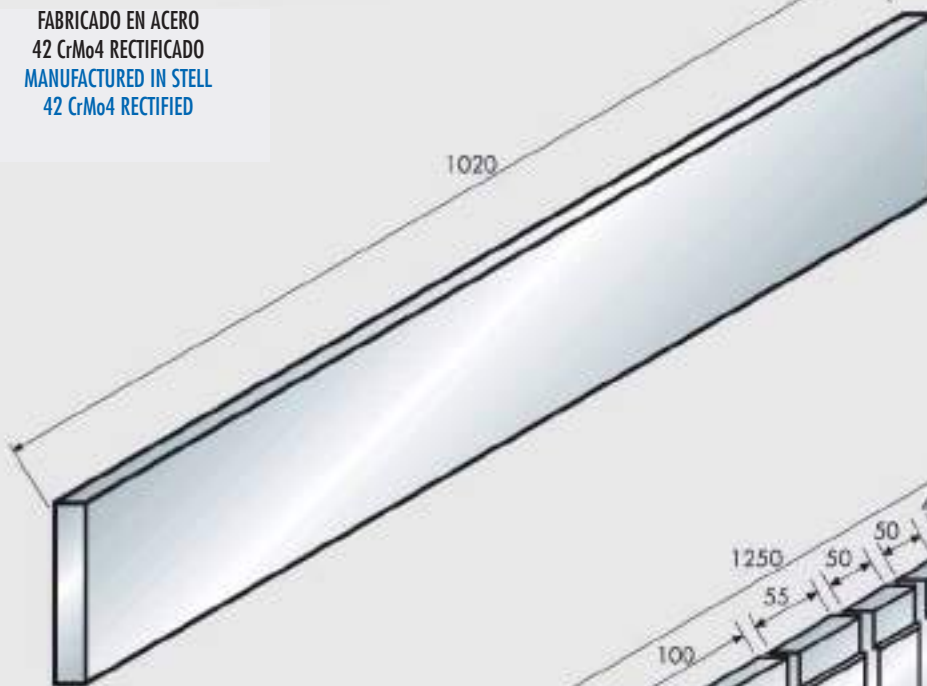


FRACCIONADO STANDAR STANDARD SECTIONING



STOCK

1411/90° - R1,4 (1.14.411/90°)
1412/85° - R0,6 (1.14.412/85°)

100 T/m

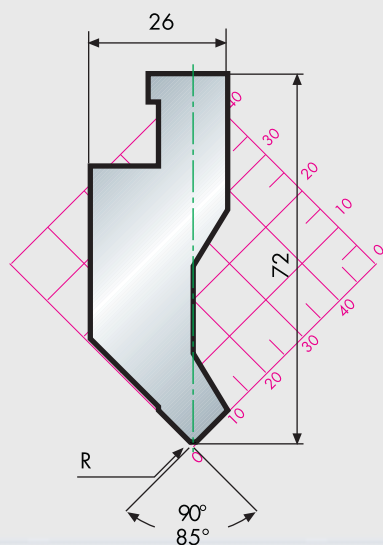


L=1.020 m/m 12kg

STOCK

1715/90° - R1,4 (1.14.715/90°)
1716/85° - R0,6 (1.14.716/85°)

100 T/m

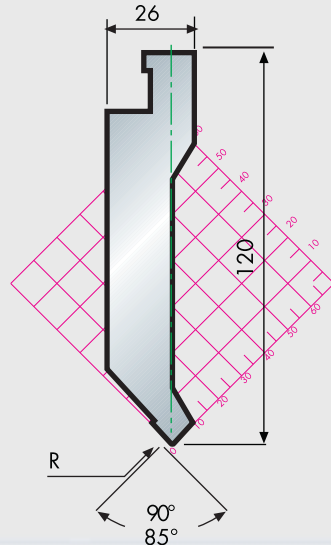


L=1.020 m/m 21kg

STOCK

1515/90° - R1,4 (3.14.515/90°)
1516/85° - R0,4 (3.14.516/85°)

70 T/m

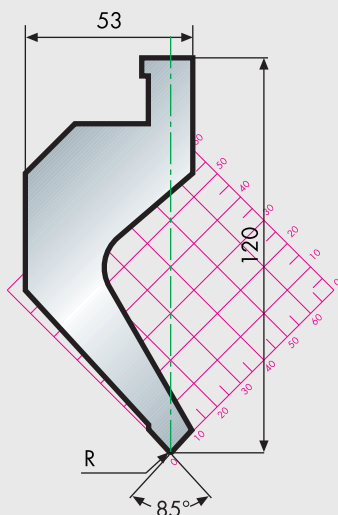


L=1.020 m/m 39kg

STOCK

1401/90° - R1 (14.401/90°)
1402/85° - R1 (14.402/85°)

70 T/m

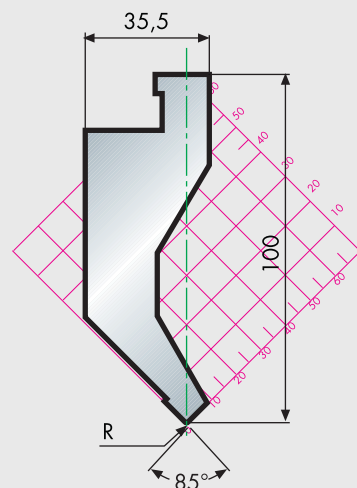


L=1.020 m/m 29kg

STOCK

1420/85° (14.420/85°)

100 T/m

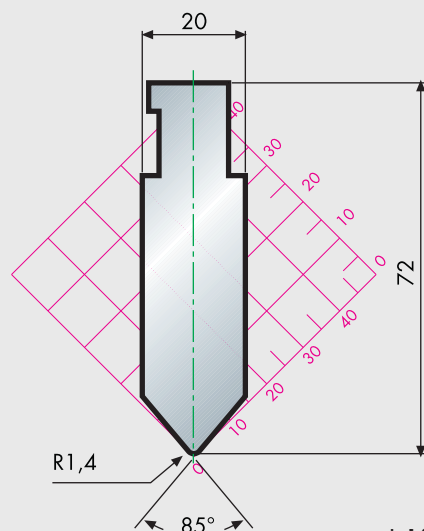


L=1.020 m/m 12kg

STOCK

1806/85° (14.806/85°)

100 T/m

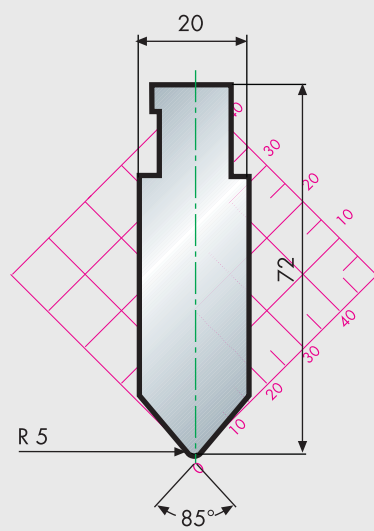


L=1.020 m/m 12kg

STOCK

* 1703/80° (14.703/80°)

100 T/m

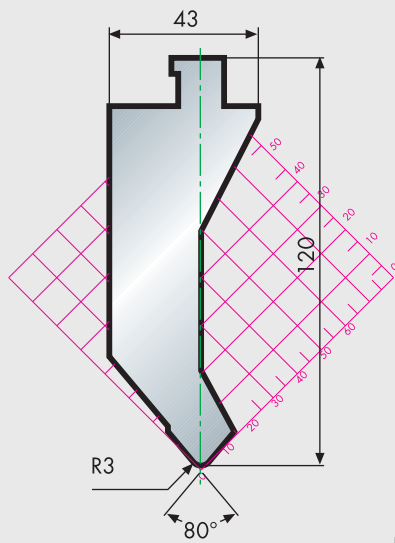


L=1.020 m/m 35kg

STOCK

* 1758/80° (14.758/80°)

100 T/m

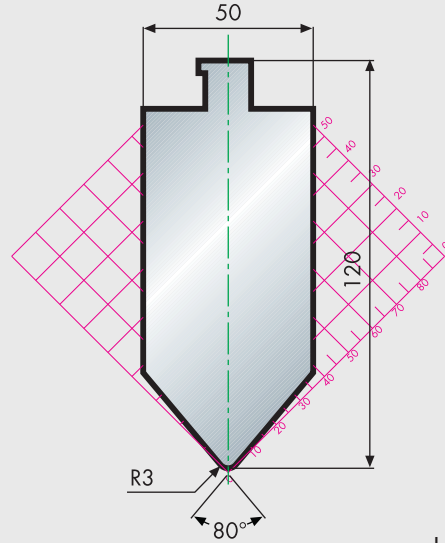


L=1.020 m/m 40kg

STOCK

* 1705/80° (14.705/80°)

100 T/m

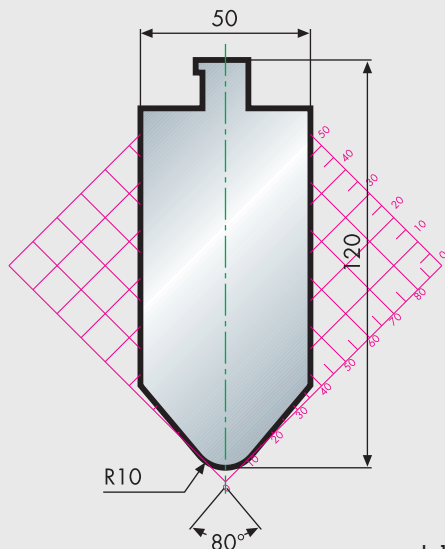


L=1.020 m/m 39kg

STOCK

1418/24° (14.418/24°)

100 T/m

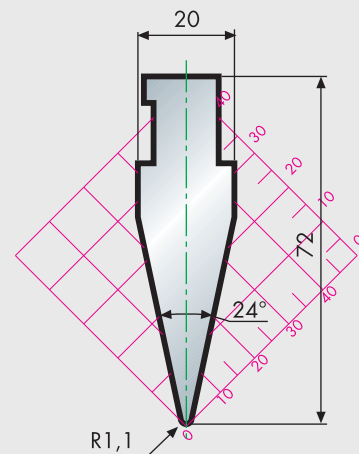


L=1.020 m/m 10kg

STOCK

1526/24° (1.14.526/24°)

100 T/m

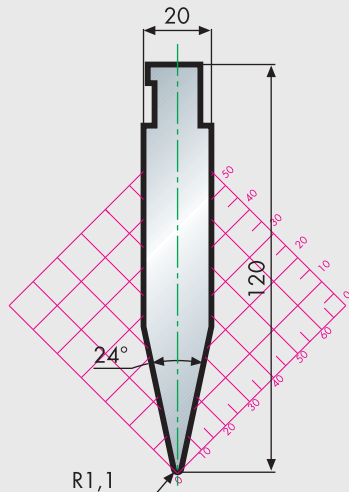


L=1.020 m/m 16kg



* 1528/24°

100 T/m

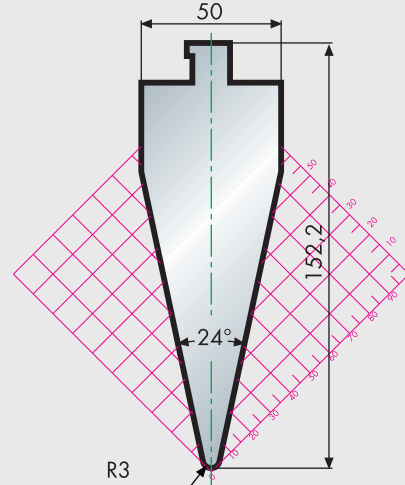


L=1.020 m/m 40kg

STOCK

1696/50° (8.14.696/50°)

90 T/m

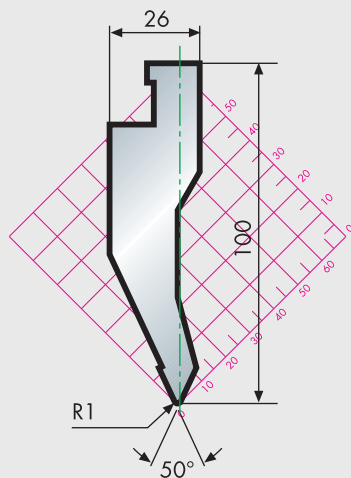


L=1.020 m/m 17kg

STOCK

1697/50° (8.14.697/50°)

90 T/m

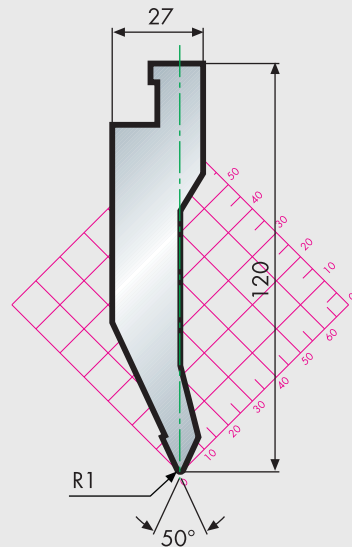


L=1.020 m/m 21kg

STOCK

1705/50° (14.705/50°)

80 T/m

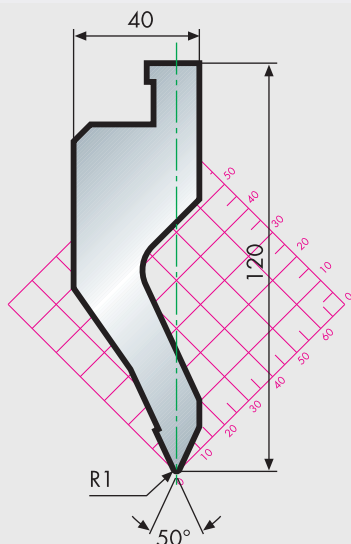


L=1.020 m/m 27kg

STOCK

*** 1517/90° - R1,4 (3.14.517/90°)**
*** 1518/80° - R3 (3.14.518/80°)**

80 T/m

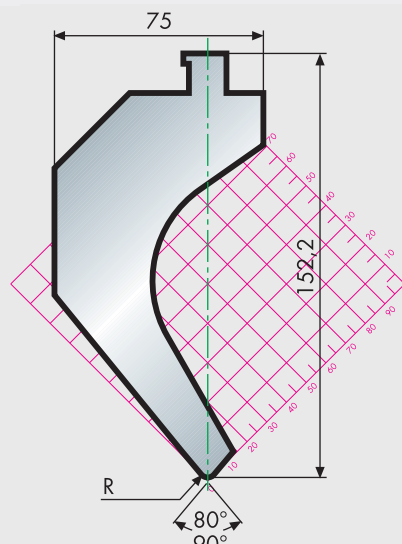


L=1.020 m/m 64kg

STOCK

1544/85° (3.14.544/85°)

70 T/m

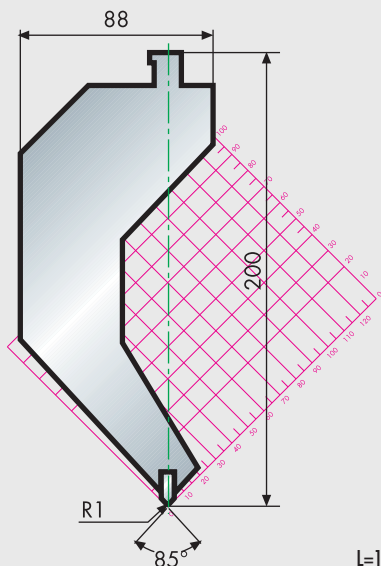


L=1.020 m/m 85kg

STOCK

1422/85° (14.412/85°)

100 T/m

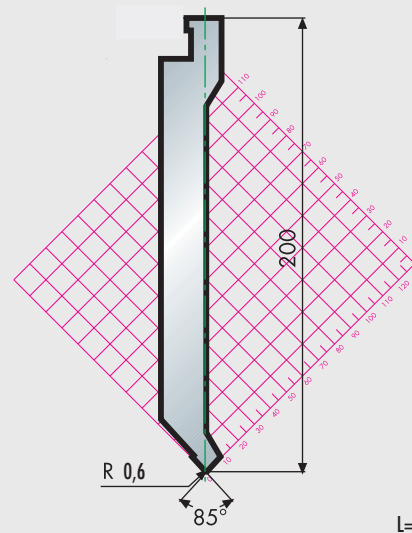


L=1.020 m/m 35kg

1419 Plano (14.419)

STOCK

100 T/m




L=1.020 m/m 14kg

* 1706 Plano (14.706)

STOCK

100 T/m




L=1.020 m/m 31kg

40.10.244

STOCK

L=415 mm
L=835 mm

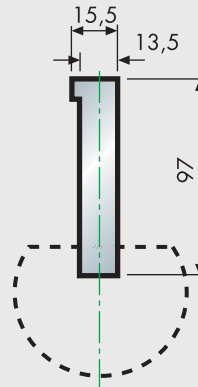

L=835m/m 10kg


40.09

17

STOCK

100 T/m

L=415 mm
L=835 mm




D	20	25	30	35	40	50	60	80	100
H	12	17	20	22	24	29	34	44	70
L=835 m/m	2	3	5	6	8	12	19	30	50

Kg



STOCK


2447 / 90° (14.447)



17Kg x mt

STOCK


2355 / 85° (14.355)



20Kg x mt

STOCK


1319 (14.319)



18Kg x mt

STOCK


M01

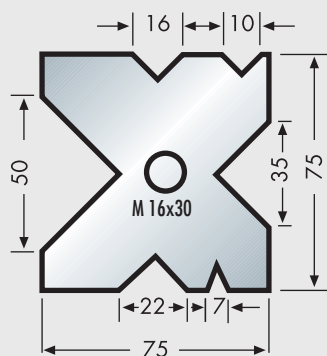

33Kg x mt

STOCK


1318 (14.318)



33Kg x mt




10.02.258

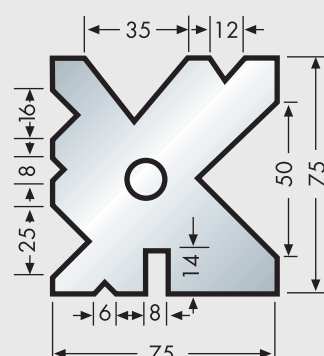

33Kg x mt

STOCK


20.10.626

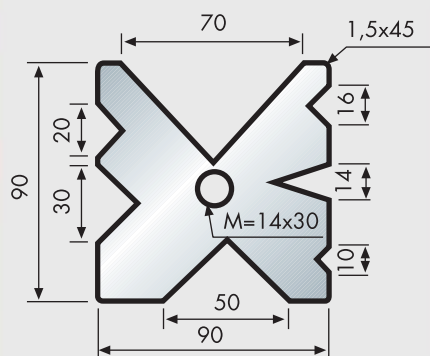

44Kg x mt

STOCK


1518 (14.518)

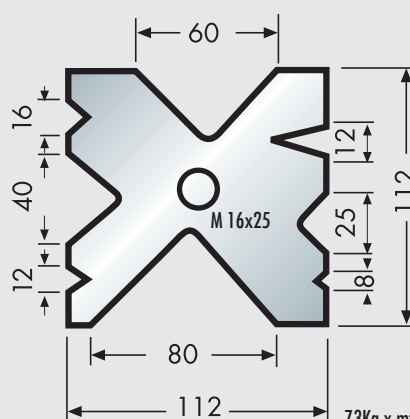

73Kg x mt


STOCK

20.10.627

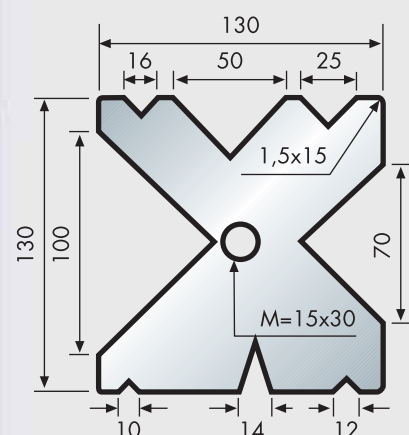


98Kg x mt


STOCK 2414/85° (14.414)

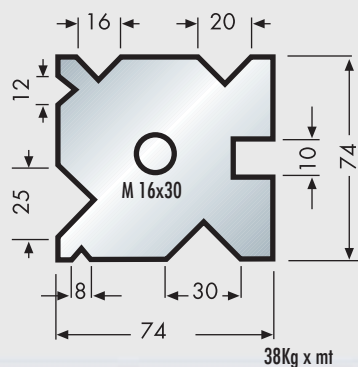


2413/90°

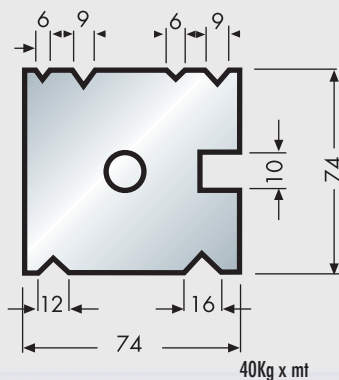


1519

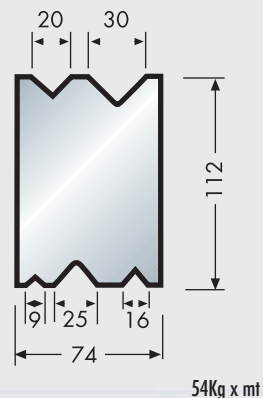


STOCK 1359/85° (14.359)

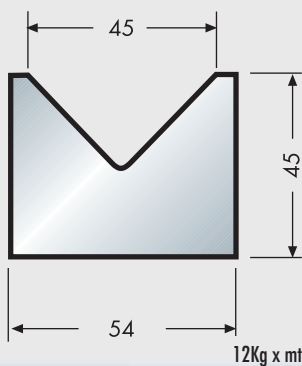


STOCK 1361/85° (14.361)

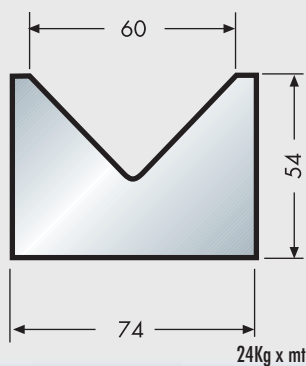


STOCK 1520/80° (14.520)

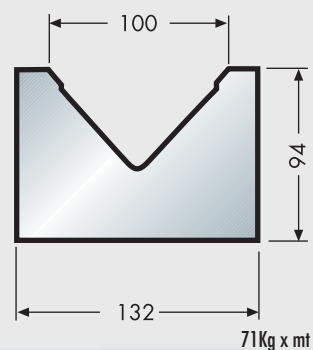


STOCK 1320 (14.320)

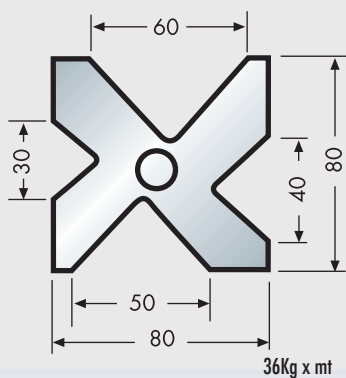

STOCK 1521 (14.521)

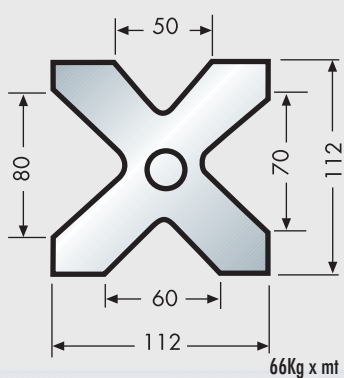


1707

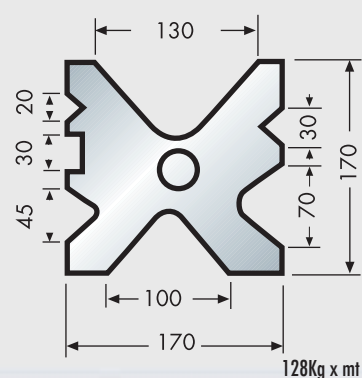




1415/85°

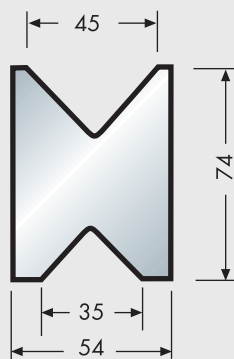

21Kg x mt




1417/85°

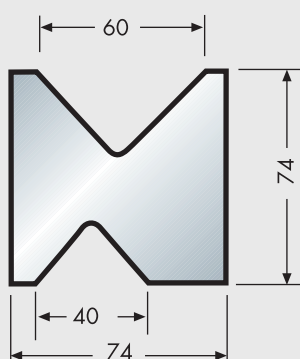

31Kg x mt




1814/80°

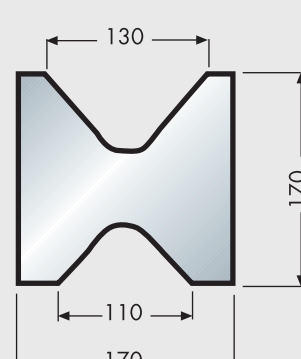

132Kg x mt

STOCK


767/50°
(6.14.767)



16Kg x mt

STOCK


768/50°
(6.14.768)

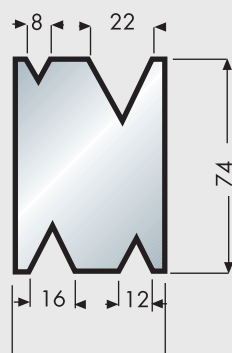

24Kg x mt

STOCK

769/50°
(6.14.769)

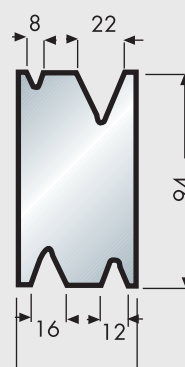

31Kg x mt




770/50°
(6.14.770)



36Kg x mt




771/50°

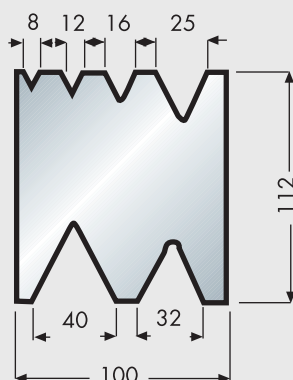

64Kg x mt




1759/80°

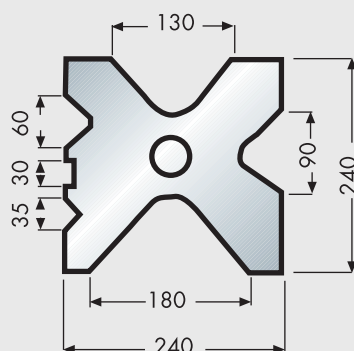

180Kg x mt

STOCK

2479/24° V6/8
(2.14.479)

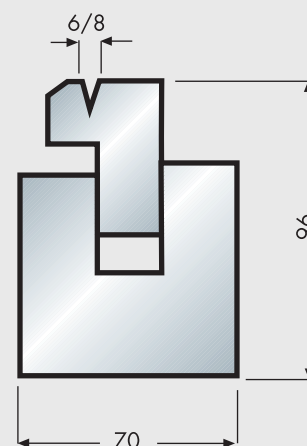

L=1.020m/m 45Kg

